




STANDARD GATE COMPONENTS

See Specifications Sheet for descriptions on most of the components shown.
All dimensions are in inches (decimal).

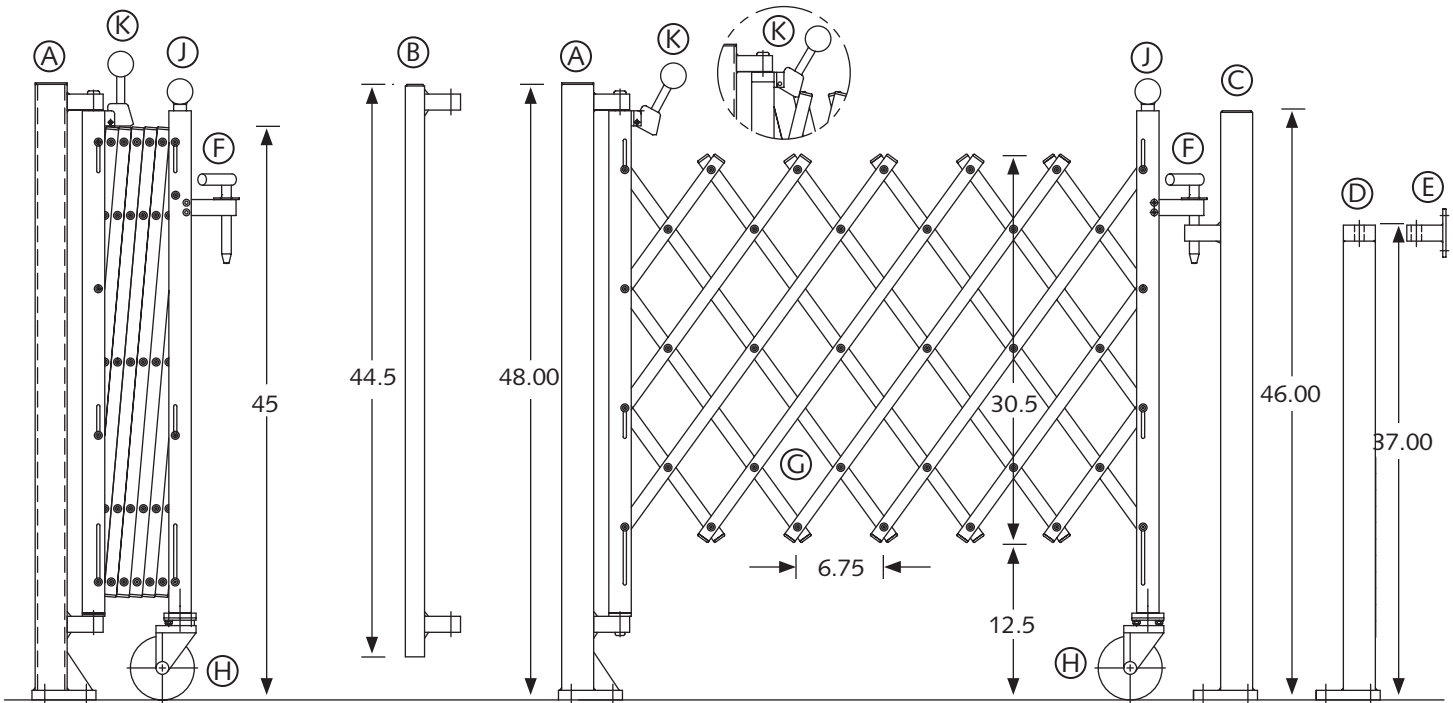

- (A) ANCHOR POST (Standard Floor Mount)
- (B) ANCHOR POST (Optional Side Mount)
- (C) LATCH POST (Tall)
- (D) LATCH POST (Short)
- (E) LATCH BRACKET
- (F) LATCH PIN (Travels with gate)
- (G) EXTENDAMATIC LINKS
- (H) CASTER
- (J) BALL HANDLE
- (K) TWO HAND ANTI-PINCH CONTROL

General Dimensions

Height from floor to top of gate when extended 43" ±
 Height from floor to top of gate when retracted 45" ±
 Gap from floor to bottom of gate 12.5" ±
 Height of extended fence (top to bottom) 30.5" ±
 Width between linking pins when extended 6.75" ±
 Width between linking pins at safety lockup 2.75" ±


Extendamatic contracts to approximately 15% of it's extended length. Swing radius is 252 degrees (*open or closed*). See Size Chart for precise extend/retract ratios.






LONG GATE ADDITIONAL COMPONENTS

See Specifications Sheet for descriptions on most of the components shown.
See Standard Gate Component sheet for dimensions.

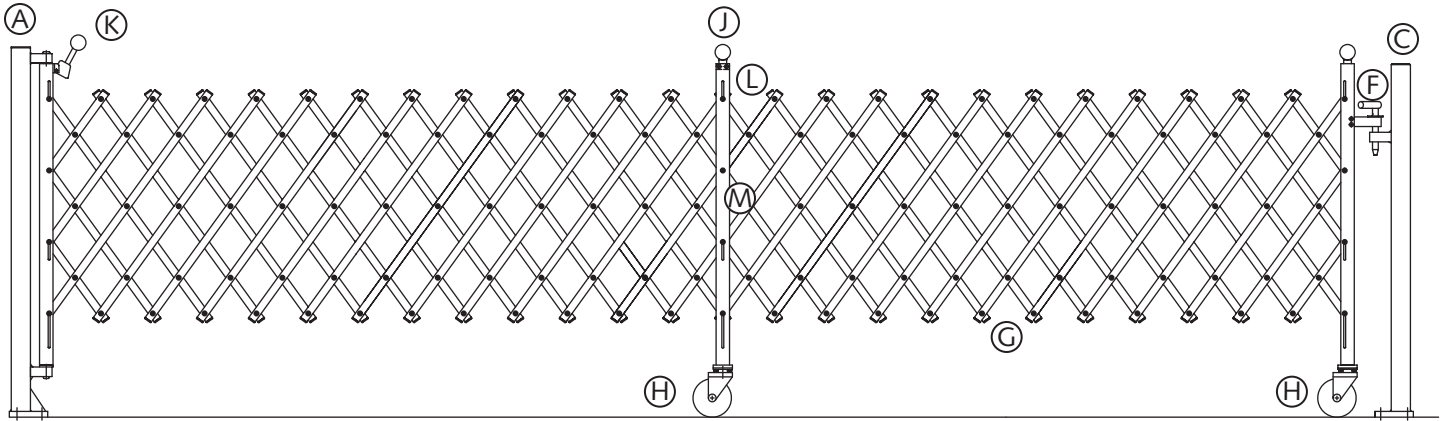

Long gate configuration with Standard Anchor Post, Latch Post and Padlockable Latch Pin and Center Support Stanchion

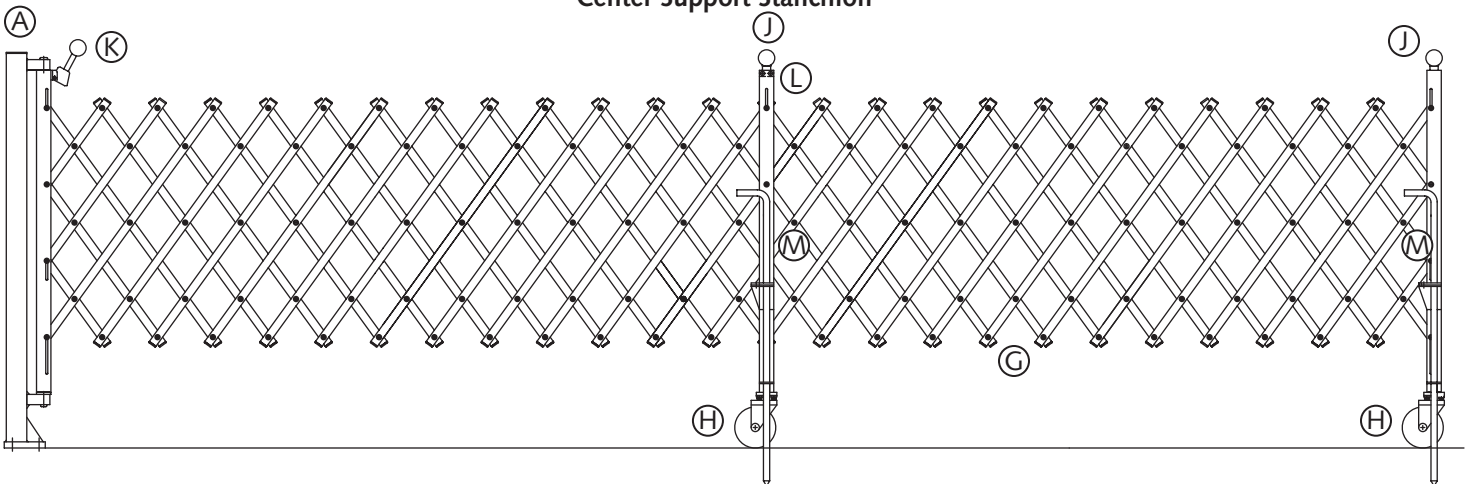

Long gate configuration with Standard Anchor Post, Center Support Stanchion, and Drop Pin anchoring to the floor. NOTE: When Drop-Pin anchoring is in place the 200 lb. OSHA side load requirement is met.

- | | |
|--|----------------------------------|
| (A) ANCHOR POST (Standard Floor Mount) | (G) EXTENDAMATIC LINKS |
| (B) ANCHOR POST (Optional Side Mount) | (H) CASTER |
| (C) LATCH POST (Tall) | (J) BALL HANDLE |
| (D) LATCH POST (Short) | (K) TWO HAND ANTI-PINCH CONTROL |
| (E) LATCH BRACKET | (L) CENTER SUPPORT STANCHION |
| (F) LATCH PIN (Travels with gate) | (M) 3/4" STEEL DROP PIN TO FLOOR |